


Framing Punchneedle

\$2⁵⁰



STEP 1: Iron around the finished punchneedle.

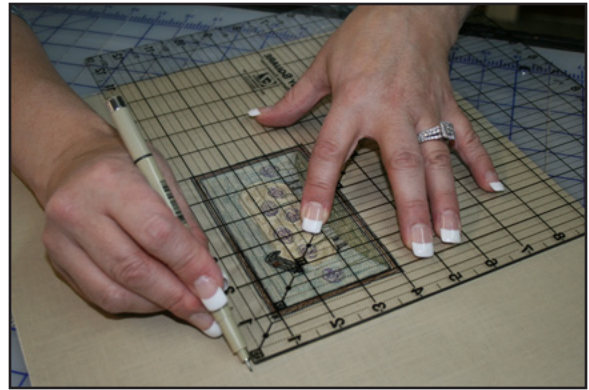

STEP 2: On the backside of the punchneedle, use a square ruler to center the design within your frame opening. In this example we are framing to a 5"x7" frame opening.



STEP 3: Using a rotary cutter and ruler cut around the drawn line at 1.5" out on all four sides.




STEP 4: Using a ruler with a 45° angle. Miter all four corners.







STEP 5: Make a copy of the back of the punchneedle to be used as a pattern for the wool.

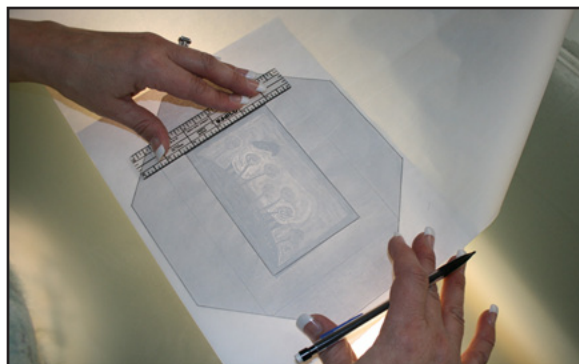


STEP 6: Lay the photocopy on a light box, cover with freezer paper shiny side down. Mark a line around the punchneedle and the outside edge.

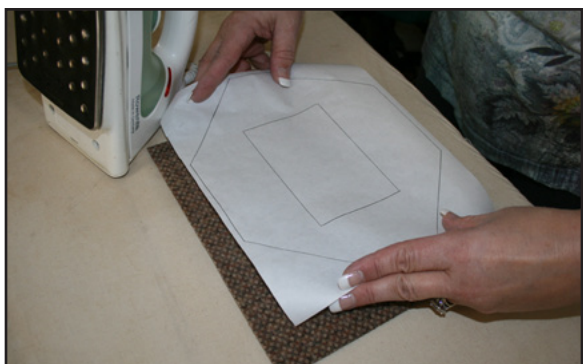


STEP 7: Iron freezer paper onto wool shiny side down.

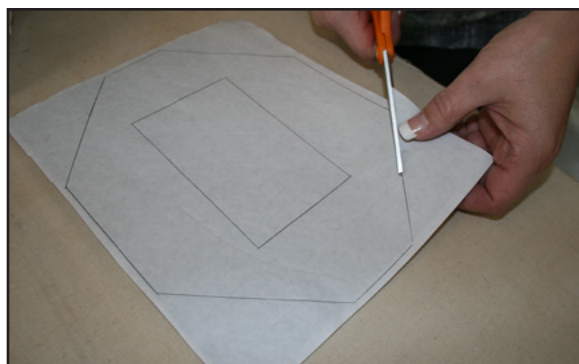

STEP 8: Cut wool and freezer paper on outside line.

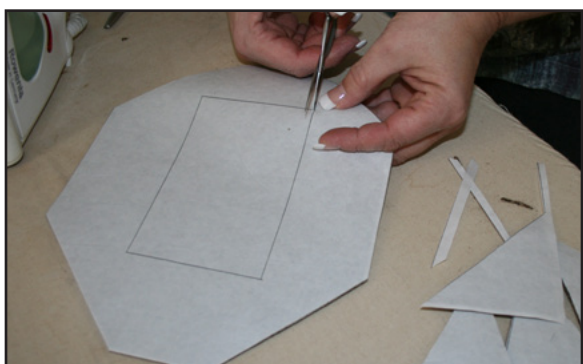

STEP 9: Cut out opening of freezer paper and wool using small pointed scissors.

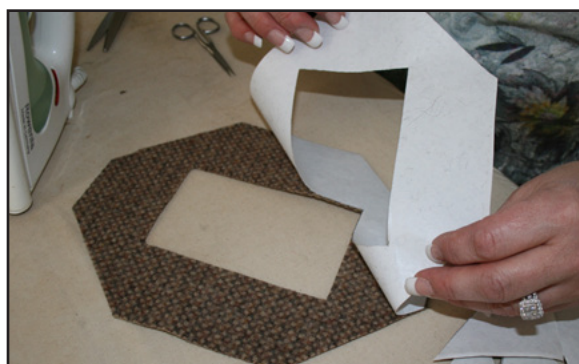

STEP 10: Remove freezer paper from wool.



STEP 11: Place wool on front of the punchneedle, fitting around the finished work.



STEP 12: Pin in place.



STEP 13: Using a running stitch, sew around punchneedle $\frac{1}{4}$ " from edge.



This is what the back should look like.



STEP 14: Peel paper backing off of sticky mounting board. We are using a 5"x7" piece.





STEP 15: Line up sticky mounting board with outer drawn line, sticky side down.



STEP 16: Press in place with caution; removing the sticky mounting board can cause the punchneedle to pull out.



STEP 17: Fold each miter corner back and stitch together.

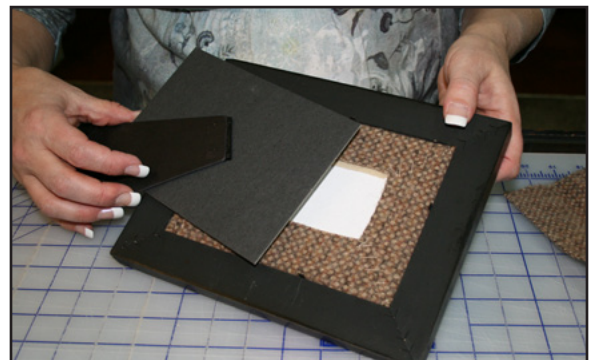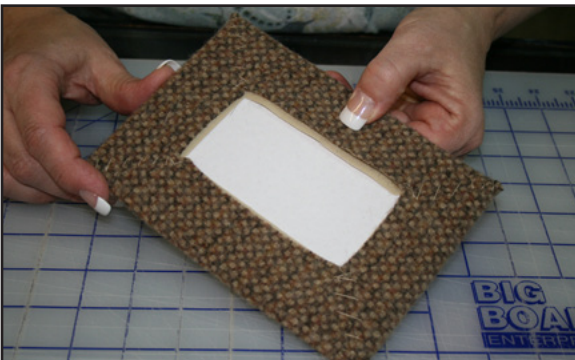

STEP 18: Insert into frame.